


- Key:**
- Highway boundary
 - Proposed road widening at new passing place.
 - Proposed road edge.
 - New precast concrete HB2 kerb with 125mm upstand. For kerb details refer to NCC standard dwg NCD-1100-02.
 - New precast concrete Bullnose kerb with 6mm upstand in pedestrian and cycleway crossings. For kerb details refer to NCC standard dwg NCD-1100-02.
 - New precast concrete Transition kerb. For kerb details refer to NCC standard dwg NCD-1100-20.
 - New precast concrete Edging. For kerb details refer to NCC standard dwg NCD-1100-02.
 - New precast concrete Quadrant kerb with R 455mm. For kerb details refer to Marshalls concrete kerb guide. Ref No. RK4710000.
 - Developer masterplan road layout.
 - Proposed earthwork.
 - New shared cycleway/footway full depth construction, refer to Appendix 11/1 for specification.
 - New footway full depth construction, refer to Appendix 11/1 for specification.
 - Proposed splitter island construction, refer to Appendix 11/1 for specification.
 - Topsoil and grass seed verge area.
 - Carriageway: Full construction, refer to Appendix 7/1 for specification.
 - Existing carriageway resurfacing, refer to Appendix 7/1 for specification.
 - New cycle track, refer to Appendix 11/1 for specification.
 - Proposed corduroy paving
 - New buff coloured tactile paving. For tactile details refer to NCC standard dwg NCD-1100-21.
 - Proposed road markings.
 - Proposed bollards.
 - Proposed traffic signs.

- Notes:**
- Ordnance survey details shown coloured grey; do not scale from OS details.
 - Existing surveyed details are shown coloured green.
 - Contractor will need to liaise with occupiers of the properties adjacent to the works prior to carrying out any works that may affect their property.
 - This drawing is to be read in conjunction with all other drawings, specification and other related information.
PKA011-HP4-0100-006 to 017 for Cross Sections,
PKA011-HP4-0100-018 to 023 for Plan & Profiles,
PKA011-HP4-0100-024 to 028 for Contour Plan,
PKA011-HP4-0100-029 to 033 for Isopachyte Plan,
PKA011-HP4-0200-001 to 005 for Site Clearance,
PKA011-HP4-0700-001 to 005 for Pavement Construction Plan,
PKA011-HP4-1100-001 to 005 for Kerbs, Footways & Paved Areas,
PKA011-HP4-1200-001 to 005 for Road Markings and Signs,
PKA011-HP4-1200-006 & 009 for Sign Face, Post and Foundation Details.
 - See Appendix 12/1 for traffic sign, post & foundation details.
 - All dimensions are in metres unless otherwise stated.
- Site Risks:**
- Refer to the scheme Health & Safety Plan for details of identified risks.
 - Prior to any excavation works, the contractor shall verify, if necessary by GPR survey and trial holes, the exact positions of all known services on site.

© Crown copyright and database rights 2024. Ordnance Survey 100019340

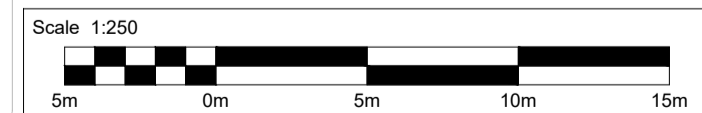


Tom McCabe
Executive Director of
Community and Environmental Services
Norfolk County Council
County Hall, Martineau Lane
Norwich NR1 2SG

DRAWING TITLE
Wells Road, Fakenham Roundabout
General Arrangement
Sheet 1 of 5

REV.	DESCRIPTION	CHECKED	DATE
P01	FIRST ISSUE	TL	14-JUL-23
P02	UPDATED DWG AS PER RSA STAGE 2 COMMENTS	SS	11-APR-24

INITIALS	DATE	DRAWING No.	PKA011-HP4-0100-001
DESIGNED BY	PKN	14-JUL-23	PROJECT TITLE Wells Road, Fakenham Roundabout
DRAWN BY	RK	14-JUL-23	
CHECKED BY	SS	11-APR-24	
APPROVED BY	RF	11-APR-24	
SCALE		1:250 @ A1	FILE No. PKA011

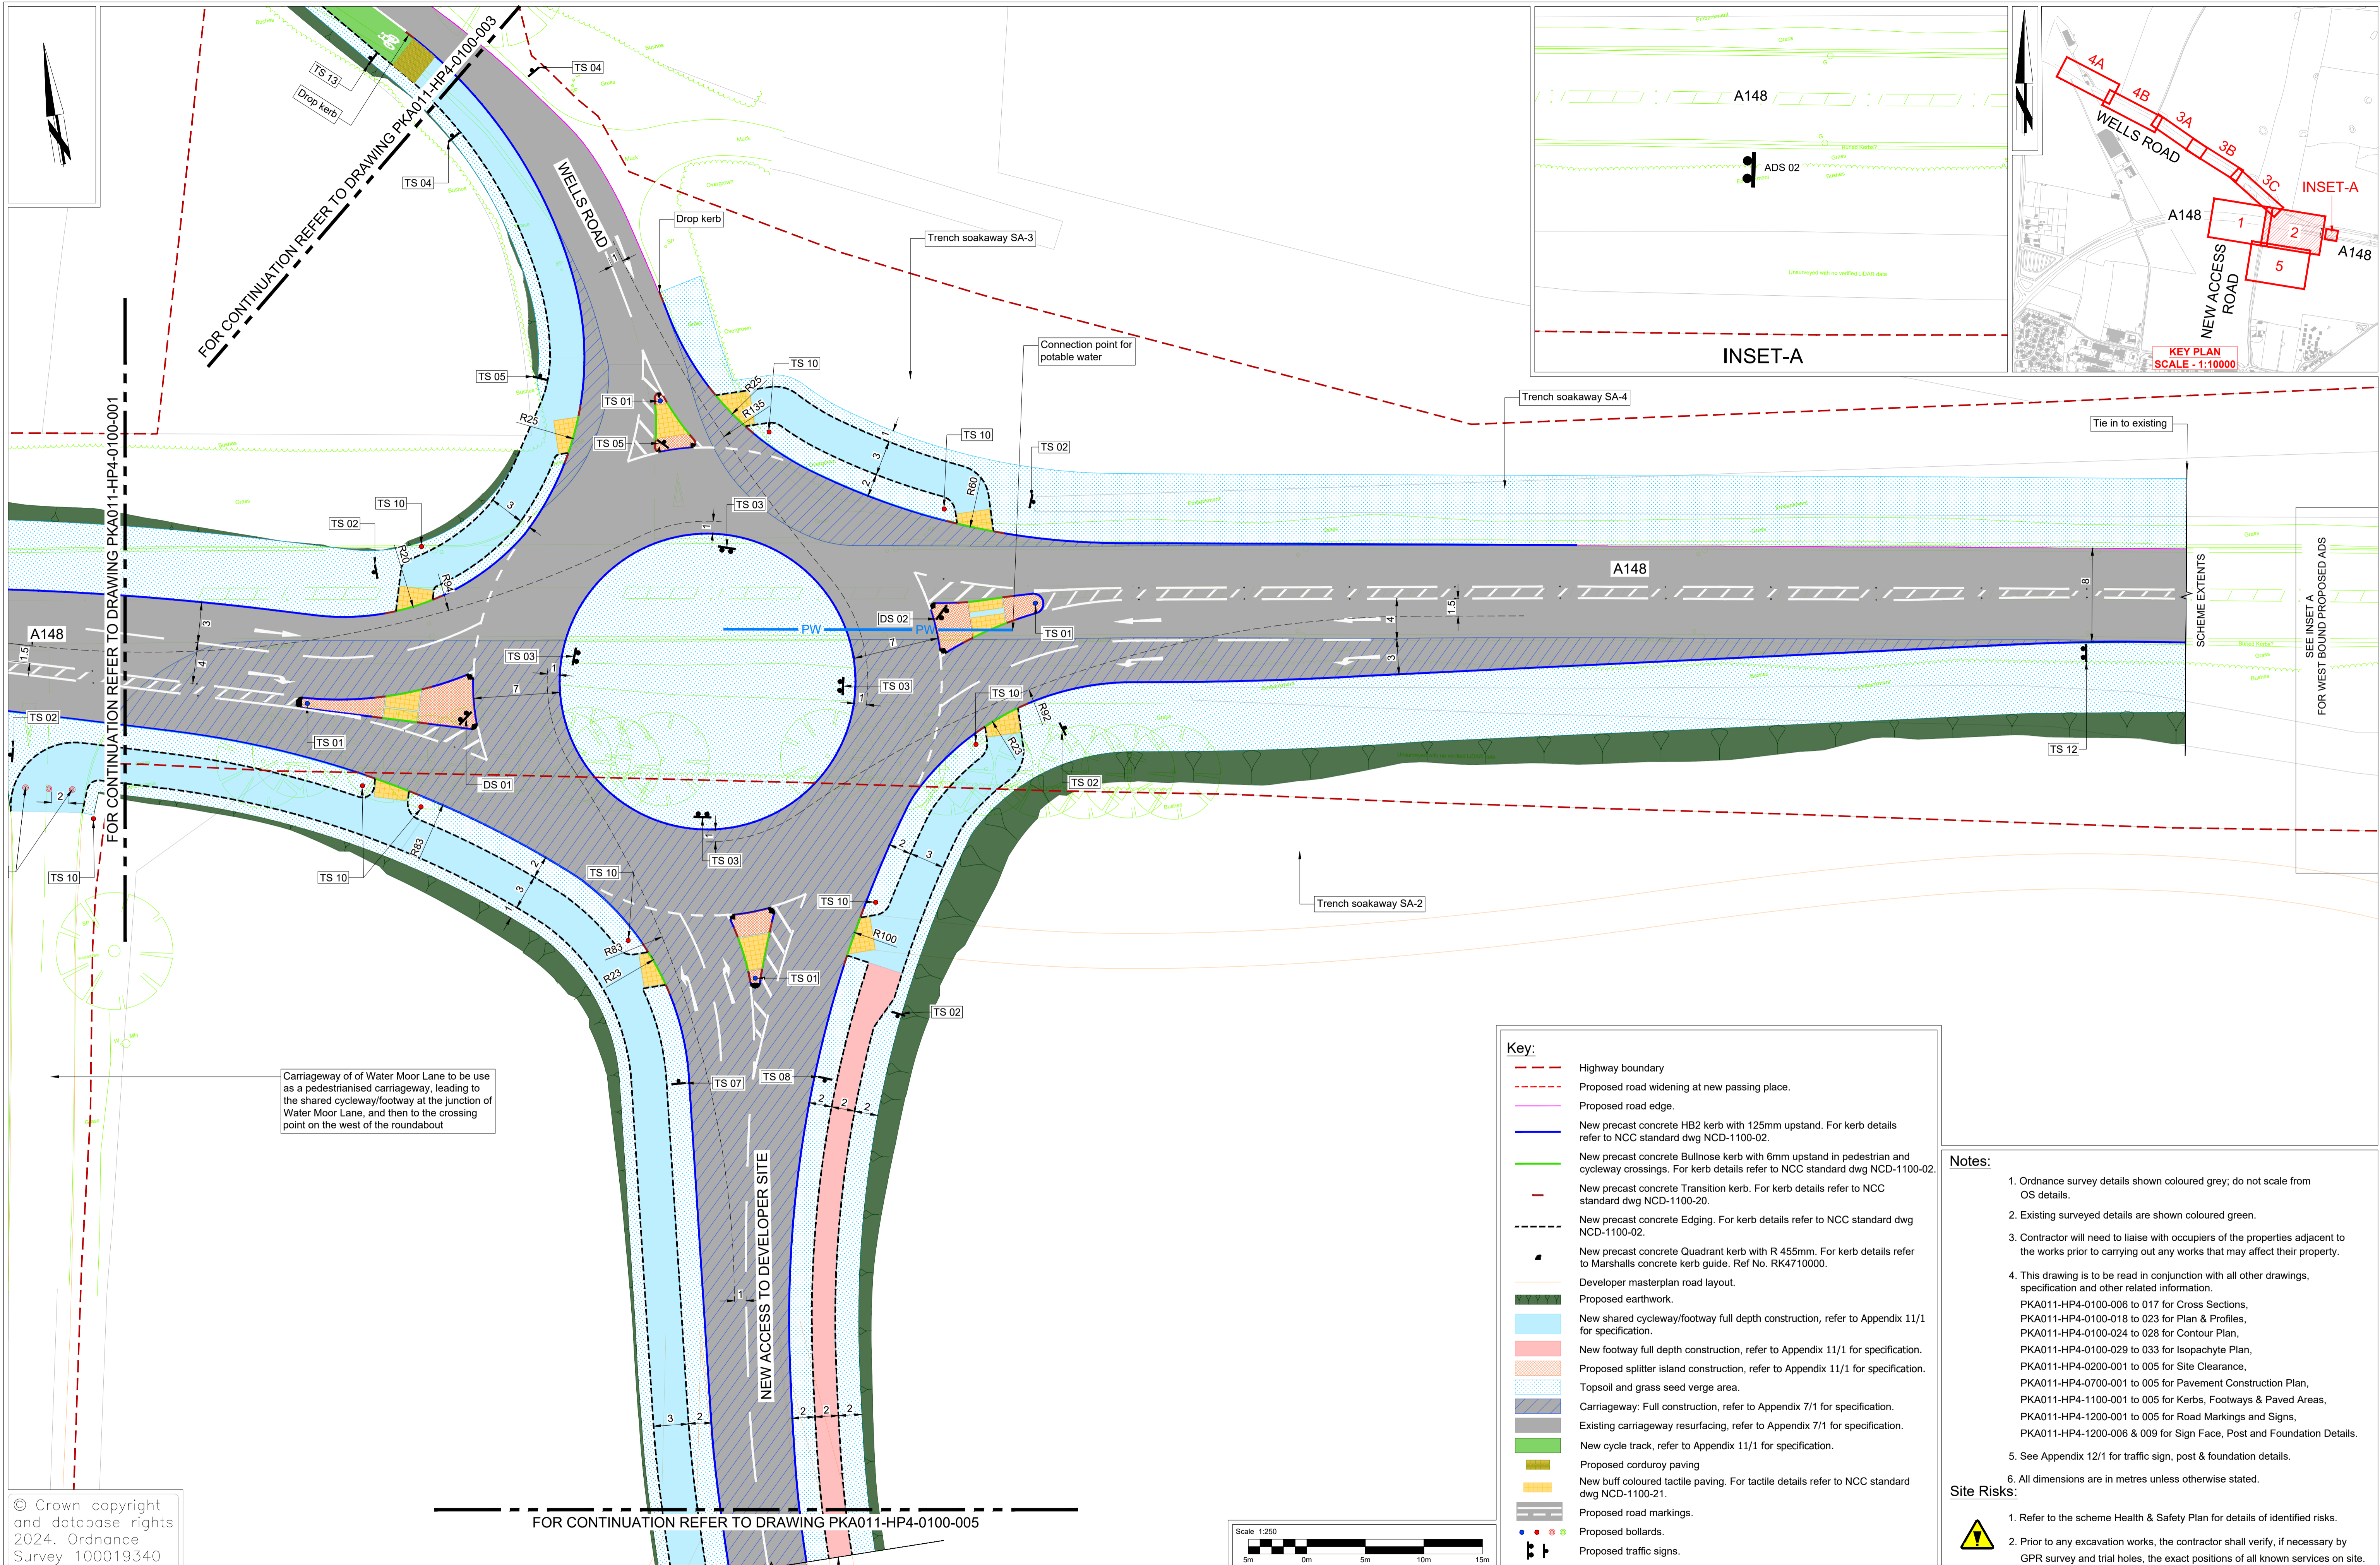

Key:

- Highway boundary
- Proposed road widening at new passing place.
- Proposed road edge.
- New precast concrete HB2 kerb with 125mm upstand. For kerb details refer to NCC standard dwg NCD-1100-02.
- New precast concrete Bullnose kerb with 6mm upstand in pedestrian and cycleway crossings. For kerb details refer to NCC standard dwg NCD-1100-20.
- New precast concrete Transition kerb. For kerb details refer to NCC standard dwg NCD-1100-02.
- New precast concrete Edging. For kerb details refer to NCC standard dwg NCD-1100-02.
- New precast concrete Quadrant kerb with R 455mm. For kerb details refer to Marshalls concrete kerb guide. Ref No. RK4710000.
- Developer masterplan road layout.
- Proposed earthwork.
- New shared cycleway/footway full depth construction, refer to Appendix 11/1 for specification.
- New footway full depth construction, refer to Appendix 11/1 for specification.
- Proposed splitter island construction, refer to Appendix 11/1 for specification.
- Topsoil and grass seed verge area.
- Carriageway: Full construction, refer to Appendix 7/1 for specification.
- Existing carriageway resurfacing, refer to Appendix 7/1 for specification.
- New cycle track, refer to Appendix 11/1 for specification.
- Proposed corduroy paving
- New buff coloured tactile paving. For tactile details refer to NCC standard dwg NCD-1100-21.
- Proposed road markings.
- Proposed bollards.
- T Proposed traffic signs.

Notes:

- Ordnance survey details shown coloured grey; do not scale from OS details.
- Existing surveyed details are shown coloured green.
- Contractor will need to liaise with occupiers of the properties adjacent to the works prior to carrying out any works that may affect their property.
- This drawing is to be read in conjunction with all other drawings, specification and other related information.
PKA011-HP4-0100-006 to 017 for Cross Sections,
PKA011-HP4-0100-018 to 023 for Plan & Profiles,
PKA011-HP4-0100-024 to 028 for Contour Plan,
PKA011-HP4-0100-029 to 033 for Isopachyte Plan,
PKA011-HP4-0200-001 to 005 for Site Clearance,
PKA011-HP4-0700-001 to 005 for Pavement Construction Plan,
PKA011-HP4-1100-001 to 005 for Kerbs, Footways & Paved Areas,
PKA011-HP4-1200-001 to 005 for Road Markings and Signs,
PKA011-HP4-1200-006 & 009 for Sign Face, Post and Foundation Details.
- See Appendix 12/1 for traffic sign, post & foundation details.
- All dimensions are in metres unless otherwise stated.

Site Risks:

- Refer to the scheme Health & Safety Plan for details of identified risks.
- Prior to any excavation works, the contractor shall verify, if necessary by GPR survey and trial holes, the exact positions of all known services on site.

© Crown copyright and database rights 2024. Ordnance Survey 100019340




Tom McCabe
Executive Director of
Community and Environmental Services
Norfolk County Council
County Hall, Martineau Lane
Norwich NR1 2SG

DRAWING TITLE
Wells Road, Fakenham Roundabout
General Arrangement
Sheet 2 of 5

REV.	DESCRIPTION	CHECKED	DATE
P01	FIRST ISSUE	TL	14-JUL-23
P02	UPDATED DWG AS PER RSA STAGE 2 COMMENTS	SS	11-APR-24

DESIGNED BY	INITIALS	DATE	DRAWING No. PKA011-HP4-0100-002
PKN	PKN	14-JUL-23	PROJECT TITLE Wells Road, Fakenham Roundabout
DRAWN BY	RK	14-JUL-23	
CHECKED BY	SS	11-APR-24	
APPROVED BY	RF	11-APR-24	
SCALE 1:250 @ A1			FILE No. PKA011


PLAN-A

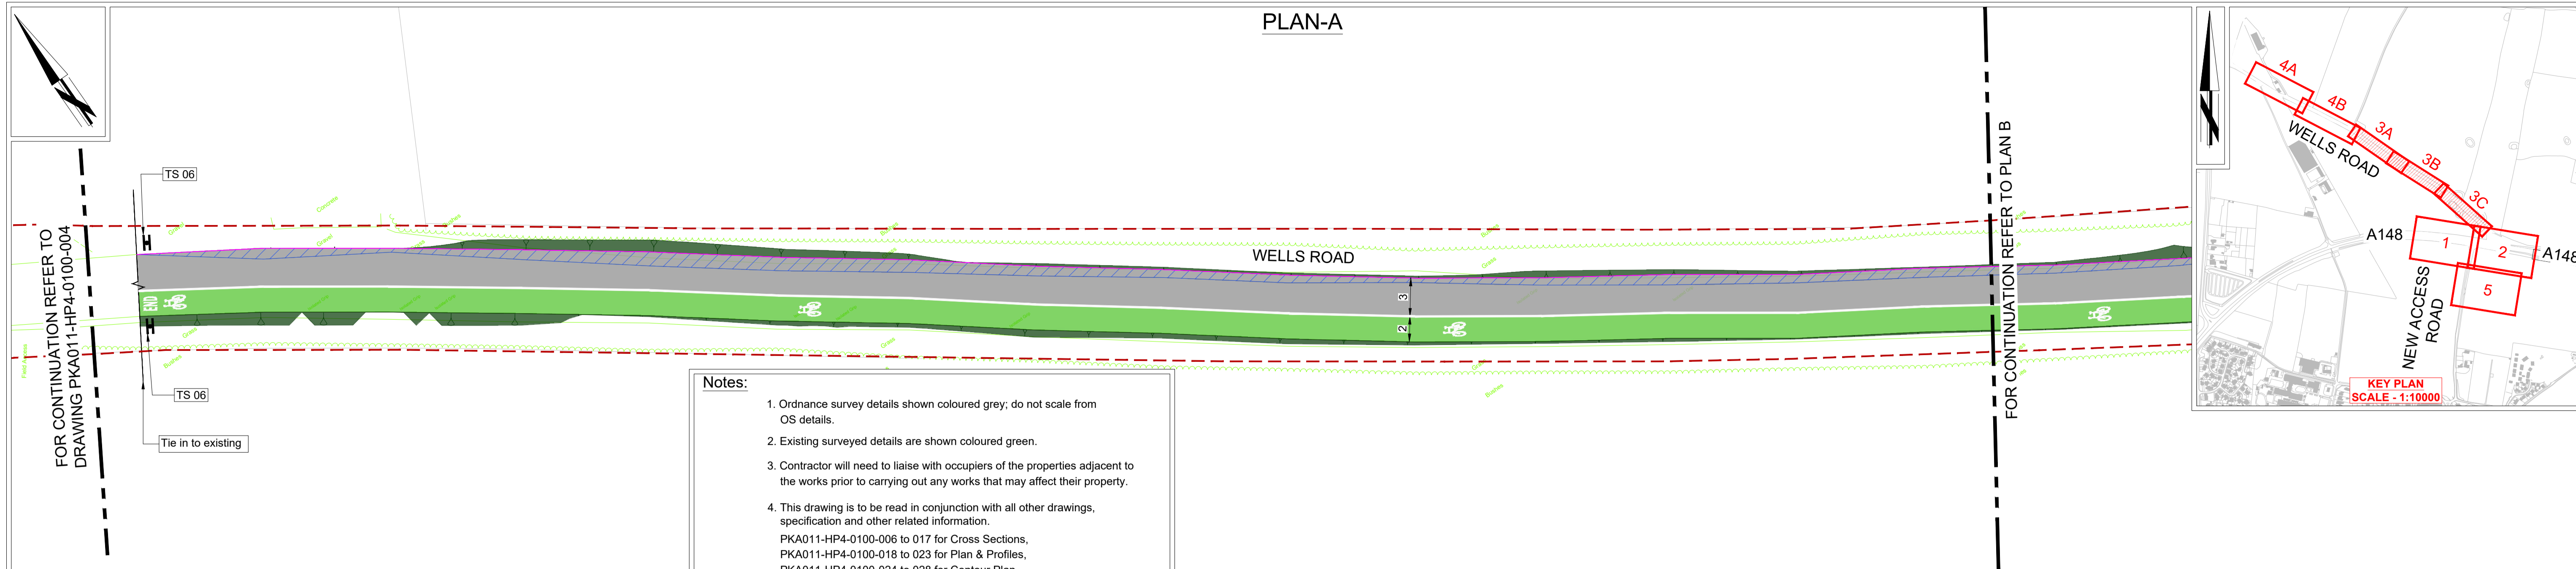


Notes:

1. Ordnance survey details shown coloured grey; do not scale from OS details.
2. Existing surveyed details are shown coloured green.
3. Contractor will need to liaise with occupiers of the properties adjacent to the works prior to carrying out any works that may affect their property.
4. This drawing is to be read in conjunction with all other drawings, specification and other related information.
PKA011-HP4-0100-006 to 017 for Cross Sections,
PKA011-HP4-0100-018 to 023 for Plan & Profiles,
PKA011-HP4-0100-024 to 028 for Contour Plan,
PKA011-HP4-0100-029 to 033 for Isopachyte Plan,
PKA011-HP4-0200-001 to 005 for Site Clearance,
PKA011-HP4-0700-001 to 005 for Pavement Construction Plan,
PKA011-HP4-1100-001 to 005 for Kerbs, Footways & Paved Areas,
PKA011-HP4-1200-001 to 005 for Road Markings and Signs,
PKA011-HP4-1200-006 & 009 for Sign Face, Post and Foundation Details.
5. See Appendix 12/1 for traffic sign, post & foundation details.
6. All dimensions are in metres unless otherwise stated.

PLAN-B

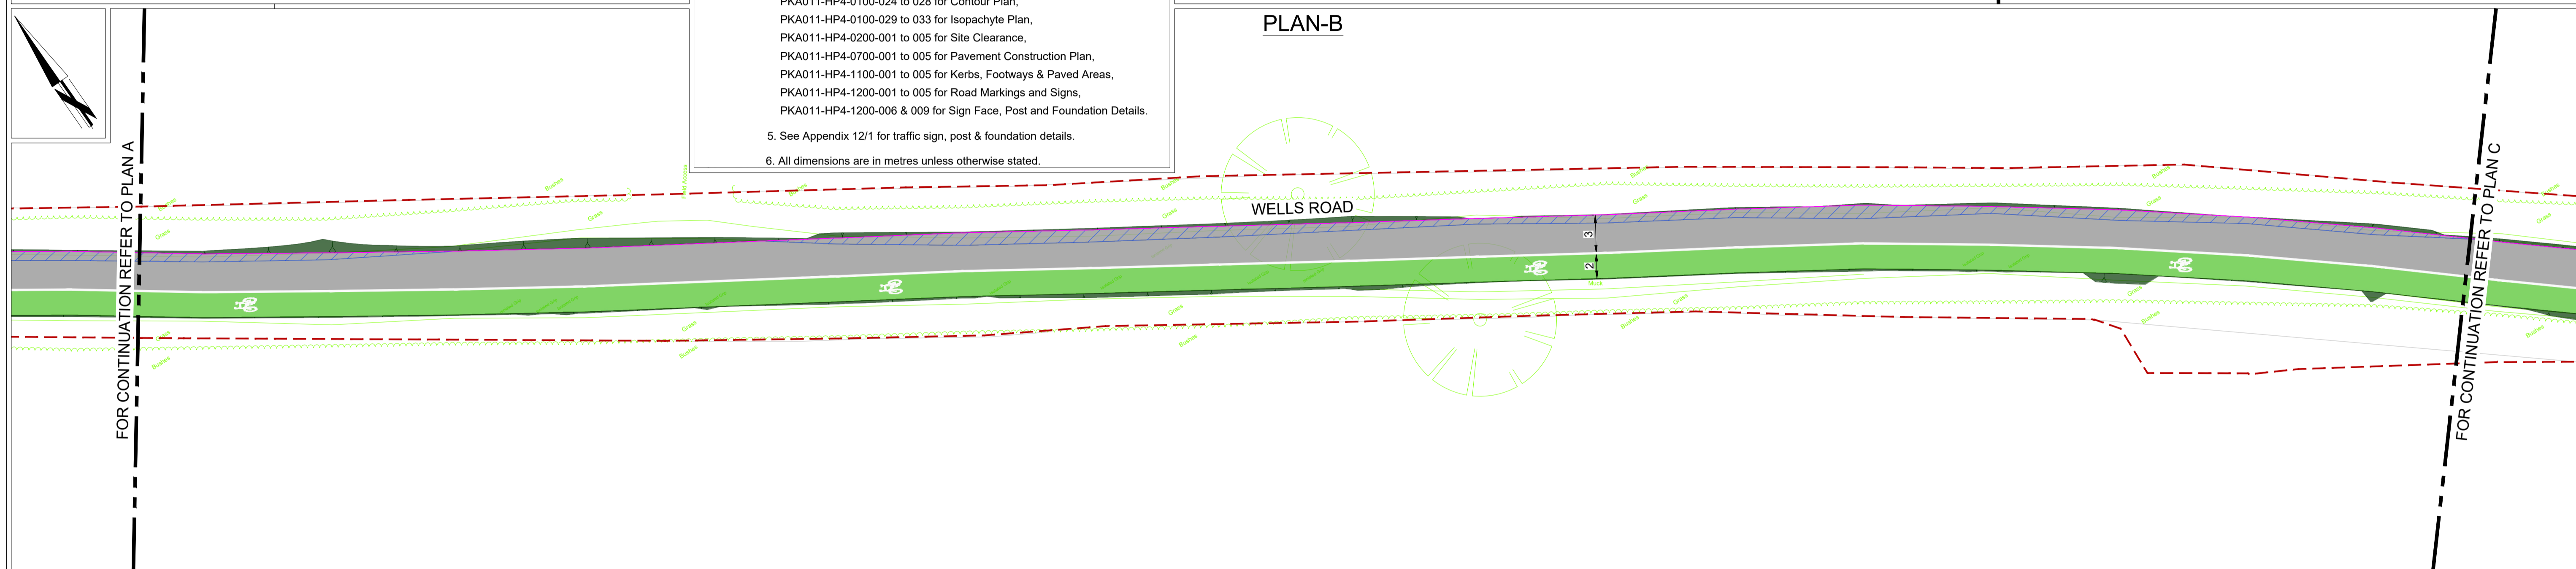

PLAN-C

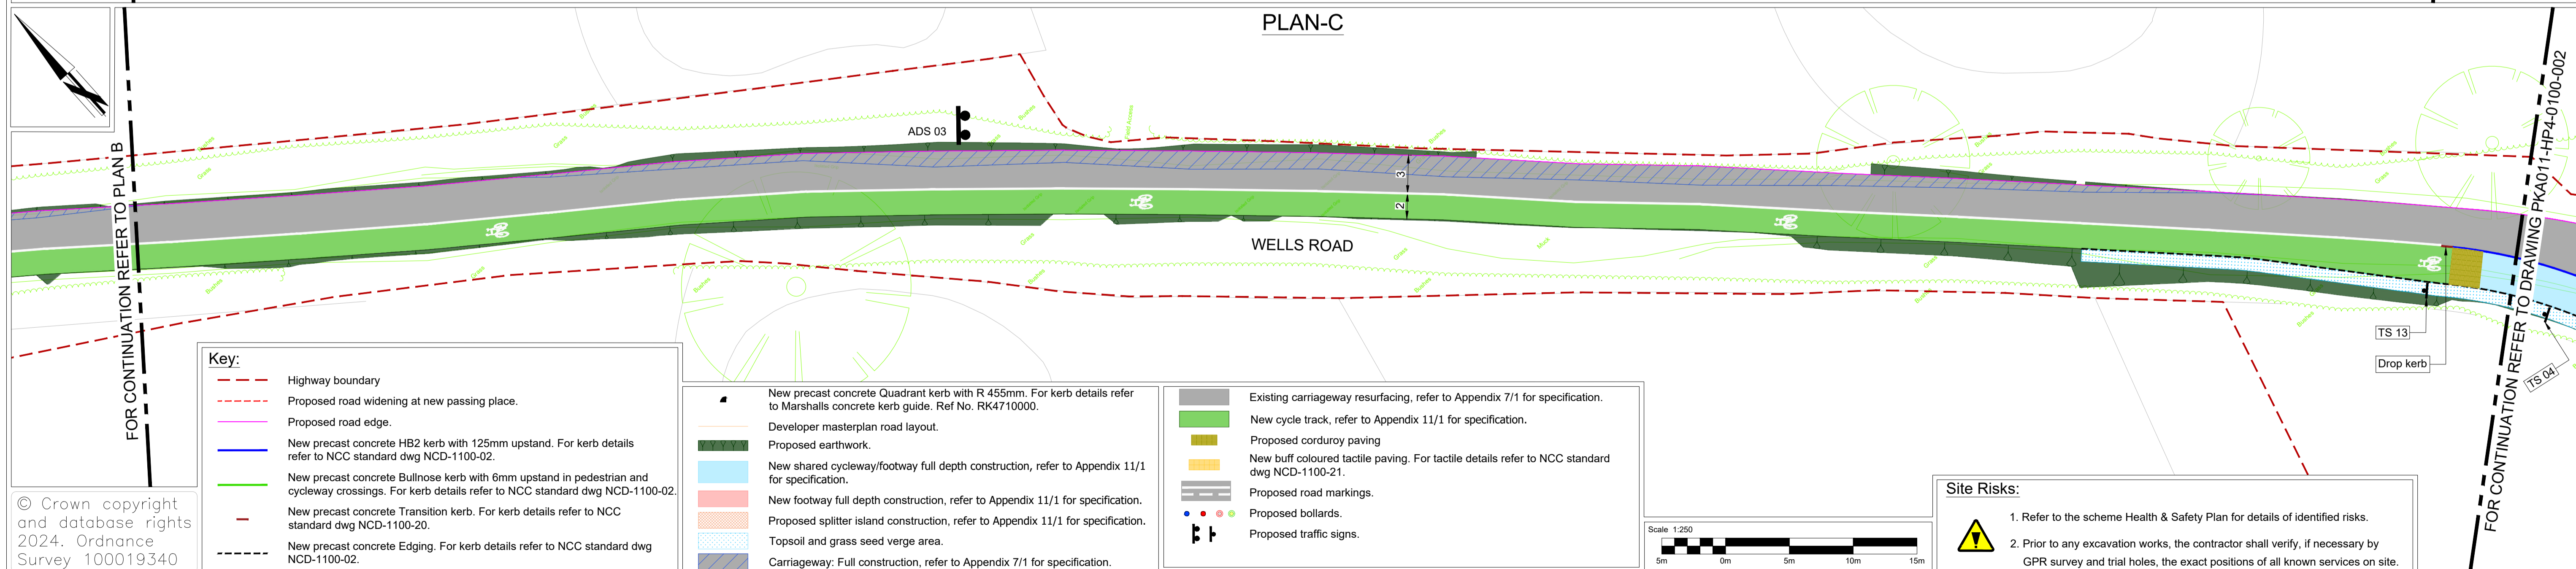

Key:


- Highway boundary
- Proposed road widening at new passing place.
- Proposed road edge.
- New precast concrete HB2 kerb with 125mm upstand. For kerb details refer to NCC standard dwg NCD-1100-02.
- New precast concrete Bullnose kerb with 6mm upstand in pedestrian and cycleway crossings. For kerb details refer to NCC standard dwg NCD-1100-20.
- New precast concrete Transition kerb. For kerb details refer to NCC standard dwg NCD-1100-02.
- New precast concrete Edging. For kerb details refer to NCC standard dwg NCD-1100-02.

- New precast concrete Quadrant kerb with R 455mm. For kerb details refer to Marshalls concrete kerb guide. Ref No. RK4710000.
- Developer masterplan road layout.
- Proposed earthwork.
- New shared cycleway/footway full depth construction, refer to Appendix 11/1 for specification.
- New footway full depth construction, refer to Appendix 11/1 for specification.
- Proposed splitter island construction, refer to Appendix 11/1 for specification.
- Topsoil and grass seed verge area.
- Carriageway: Full construction, refer to Appendix 7/1 for specification.

- Existing carriageway resurfacing, refer to Appendix 7/1 for specification.
- New cycle track, refer to Appendix 11/1 for specification.
- Proposed corduroy paving
- New buff coloured tactile paving. For tactile details refer to NCC standard dwg NCD-1100-21.
- Proposed road markings.
- Proposed bollards.
- Proposed traffic signs.

Site Risks:

1. Refer to the scheme Health & Safety Plan for details of identified risks.
2. Prior to any excavation works, the contractor shall verify, if necessary by GPR survey and trial holes, the exact positions of all known services on site.

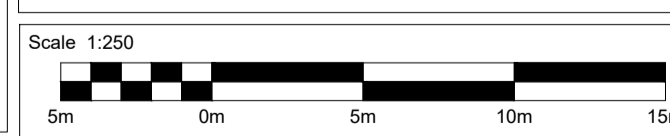

© Crown copyright and database rights 2024. Ordnance Survey 100019340



Tom McCabe
Executive Director of
Community and Environmental Services
Norfolk County Council
County Hall, Martineau Lane
Norwich NR1 2SG

DRAWING TITLE
Wells Road, Fakenham Roundabout
General Arrangement
Sheet 3 of 5


REV.	DESCRIPTION	CHECKED	DATE
P01	FIRST ISSUE	TL	14-JUL-23
P02	UPDATED DWG AS PER RSA STAGE 2 COMMENTS	SS	11-APR-24

DESIGNED BY	INITIALS	DATE	DRAWING No.
PKN	PKN	14-JUL-23	PKA011-HP4-0100-003
DRAWN BY	RK	14-JUL-23	PROJECT TITLE
CHECKED BY	SS	11-APR-24	Wells Road, Fakenham Roundabout
APPROVED BY	RF	11-APR-24	SCALE 1:250 @ A1
			FILE No. PKA011


PLAN-A



- Notes:**
1. Ordnance survey details shown coloured grey, do not scale from OS details.
 2. Existing surveyed details are shown coloured green.
 3. Contractor will need to liaise with occupiers of the properties adjacent to the works prior to carrying out any works that may affect their property.
 4. This drawing is to be read in conjunction with all other drawings, specification and other related information.
PKA011-HP4-0100-006 to 017 for Cross Sections,
PKA011-HP4-0100-018 to 023 for Plan & Profiles,
PKA011-HP4-0100-024 to 028 for Contour Plan,
PKA011-HP4-0100-029 to 033 for Isopachyte Plan,
PKA011-HP4-0200-001 to 005 for Site Clearance,
PKA011-HP4-0700-001 to 005 for Pavement Construction Plan,
PKA011-HP4-1100-001 to 005 for Kerbs, Footways & Paved Areas,
PKA011-HP4-1200-001 to 005 for Road Markings and Signs,
PKA011-HP4-1200-006 & 009 for Sign Face, Post and Foundation Details.
 5. See Appendix 12/1 for traffic sign, post & foundation details.
 6. All dimensions are in metres unless otherwise stated.
- Site Risks:**
1. Refer to the scheme Health & Safety Plan for details of identified risks.
 2. Prior to any excavation works, the contractor shall verify, if necessary by GPR survey and trial holes, the exact positions of all known services on site.

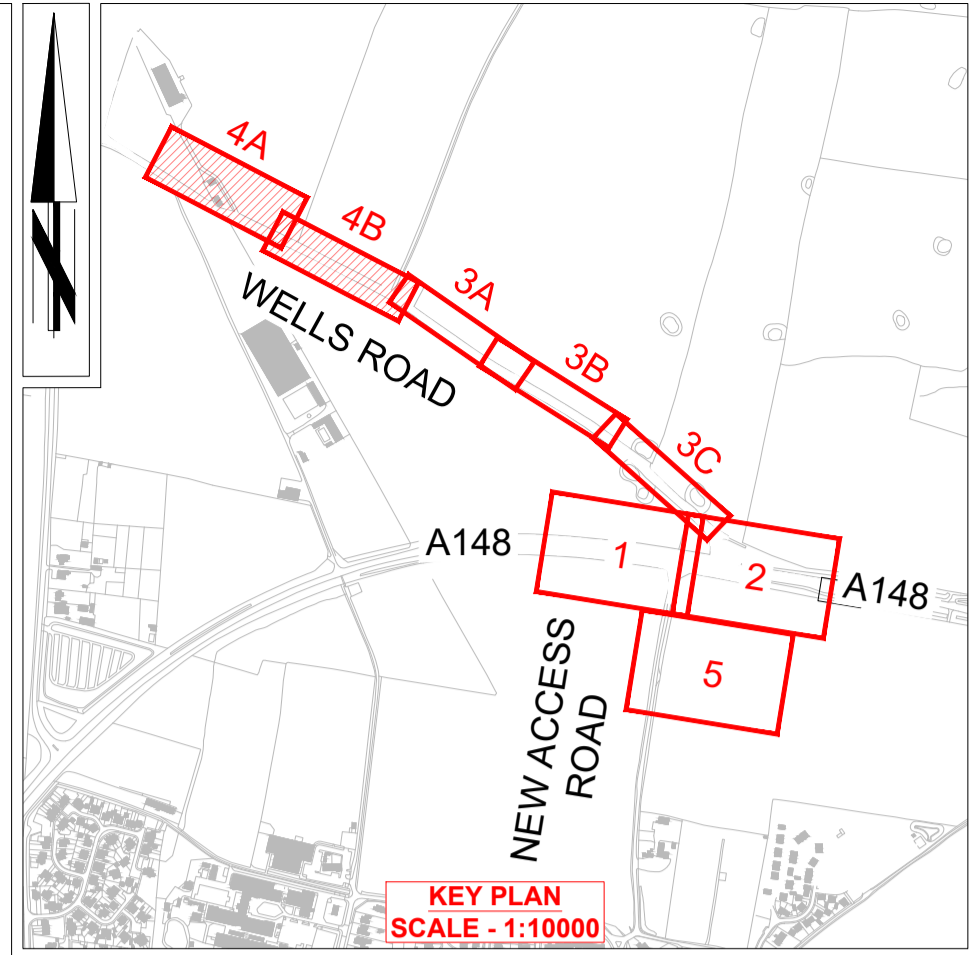

PLAN-B

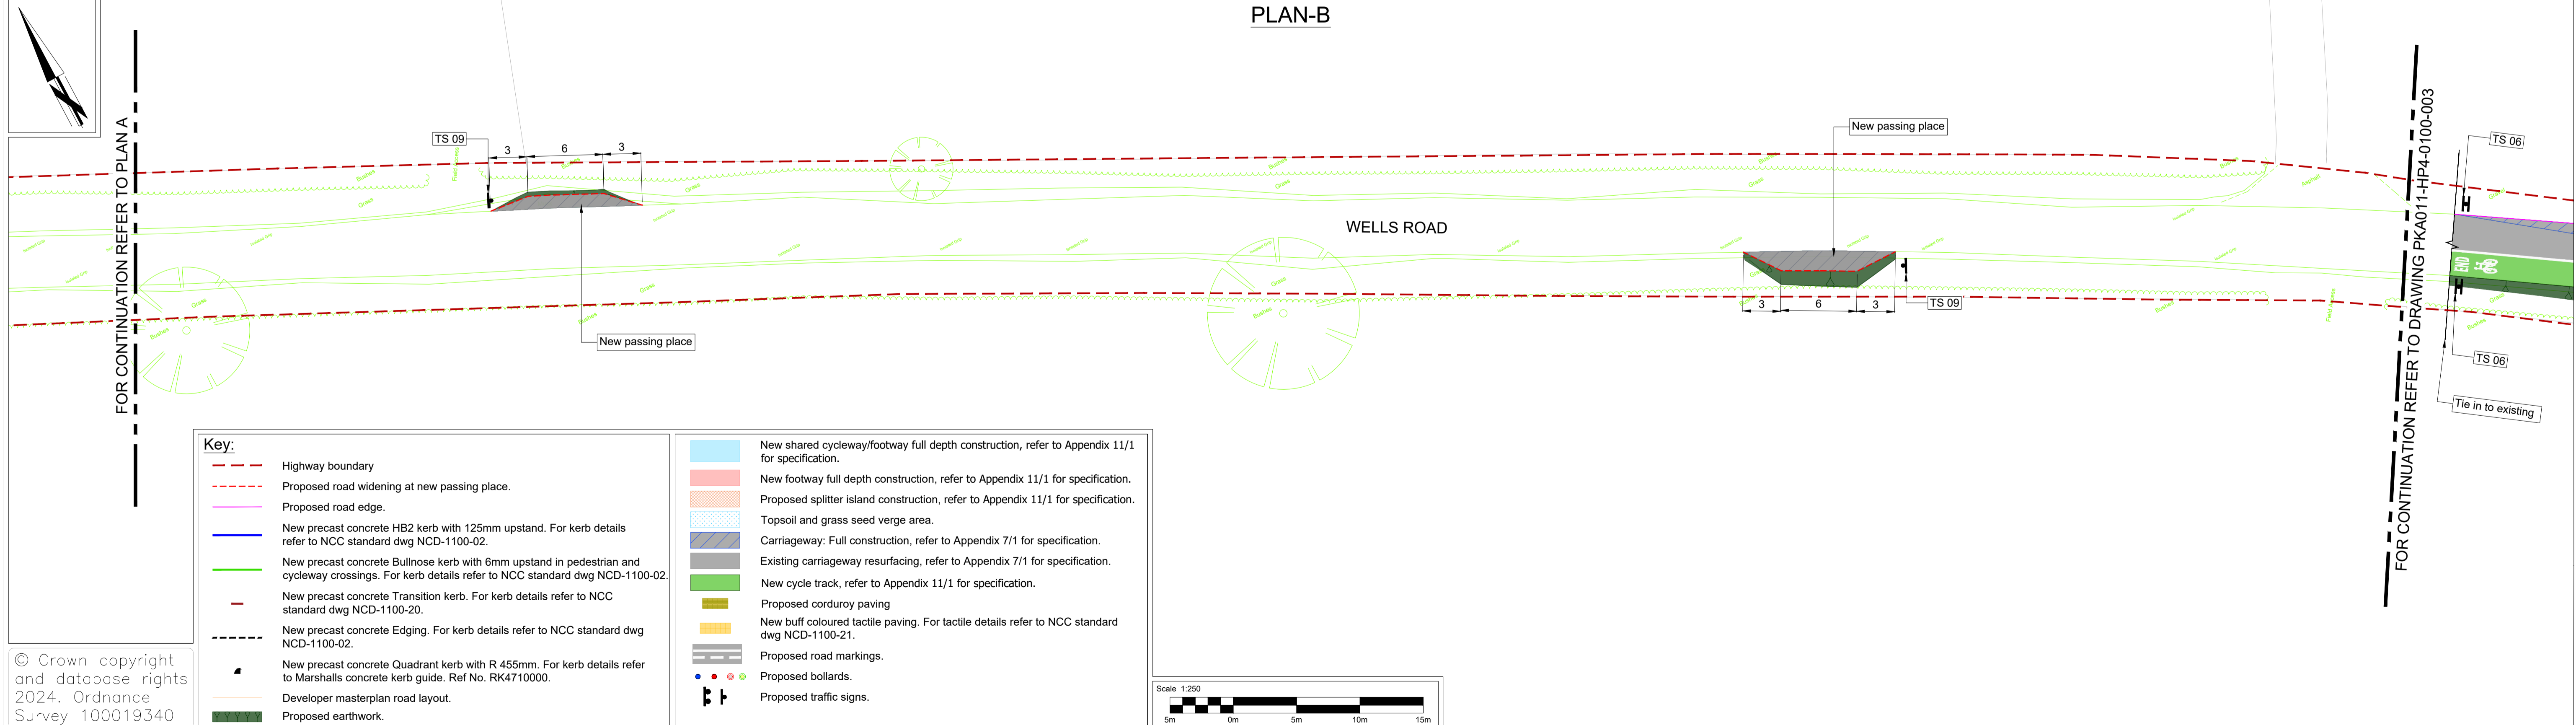

- Key:**
- Highway boundary
 - Proposed road widening at new passing place.
 - Proposed road edge.
 - New precast concrete HB2 kerb with 125mm upstand. For kerb details refer to NCC standard dwg NCD-1100-02.
 - New precast concrete Bullnose kerb with 6mm upstand in pedestrian and cycleway crossings. For kerb details refer to NCC standard dwg NCD-1100-02.
 - New precast concrete Transition kerb. For kerb details refer to NCC standard dwg NCD-1100-20.
 - New precast concrete Edging. For kerb details refer to NCC standard dwg NCD-1100-02.
 - New precast concrete Quadrant kerb with R 455mm. For kerb details refer to Marshalls concrete kerb guide. Ref No. RK4710000.
 - Developer masterplan road layout.
 - Proposed earthwork.
- New shared cycleway/footway full depth construction, refer to Appendix 11/1 for specification.
 - New footway full depth construction, refer to Appendix 11/1 for specification.
 - Proposed splitter island construction, refer to Appendix 11/1 for specification.
 - Topsoil and grass seed verge area.
 - Carriageway: Full construction, refer to Appendix 7/1 for specification.
 - Existing carriageway resurfacing, refer to Appendix 7/1 for specification.
 - New cycle track, refer to Appendix 11/1 for specification.
 - Proposed corduroy paving
 - New buff coloured tactile paving. For tactile details refer to NCC standard dwg NCD-1100-21.
 - Proposed road markings.
 - Proposed bollards.
 - Proposed traffic signs.

© Crown copyright and database rights 2024. Ordnance Survey 100019340





Tom McCabe
Executive Director of
Community and Environmental Services
Norfolk County Council
County Hall, Martineau Lane
Norwich NR1 2SG

DRAWING TITLE
Wells Road, Fakenham Roundabout
General Arrangement
Sheet 4 of 5

REV.	DESCRIPTION	CHECKED	DATE
P01	FIRST ISSUE	TL	14-JUL-23
P02	UPDATED DWG AS PER RSA STAGE 2 COMMENTS	SS	11-APR-24

DESIGNED BY	INITIALS	DATE	DRAWING No. PKA011-HP4-0100-004
PKN	PKN	14-JUL-23	PROJECT TITLE Wells Road, Fakenham Roundabout
DRAWN BY	RK	14-JUL-23	
CHECKED BY	SS	11-APR-24	
APPROVED BY	RF	11-APR-24	SCALE 1:250 @ A1
			FILE No. PKA011

FOR CONTINUATION REFER TO DRAWING PKA011-HP4-0100-002

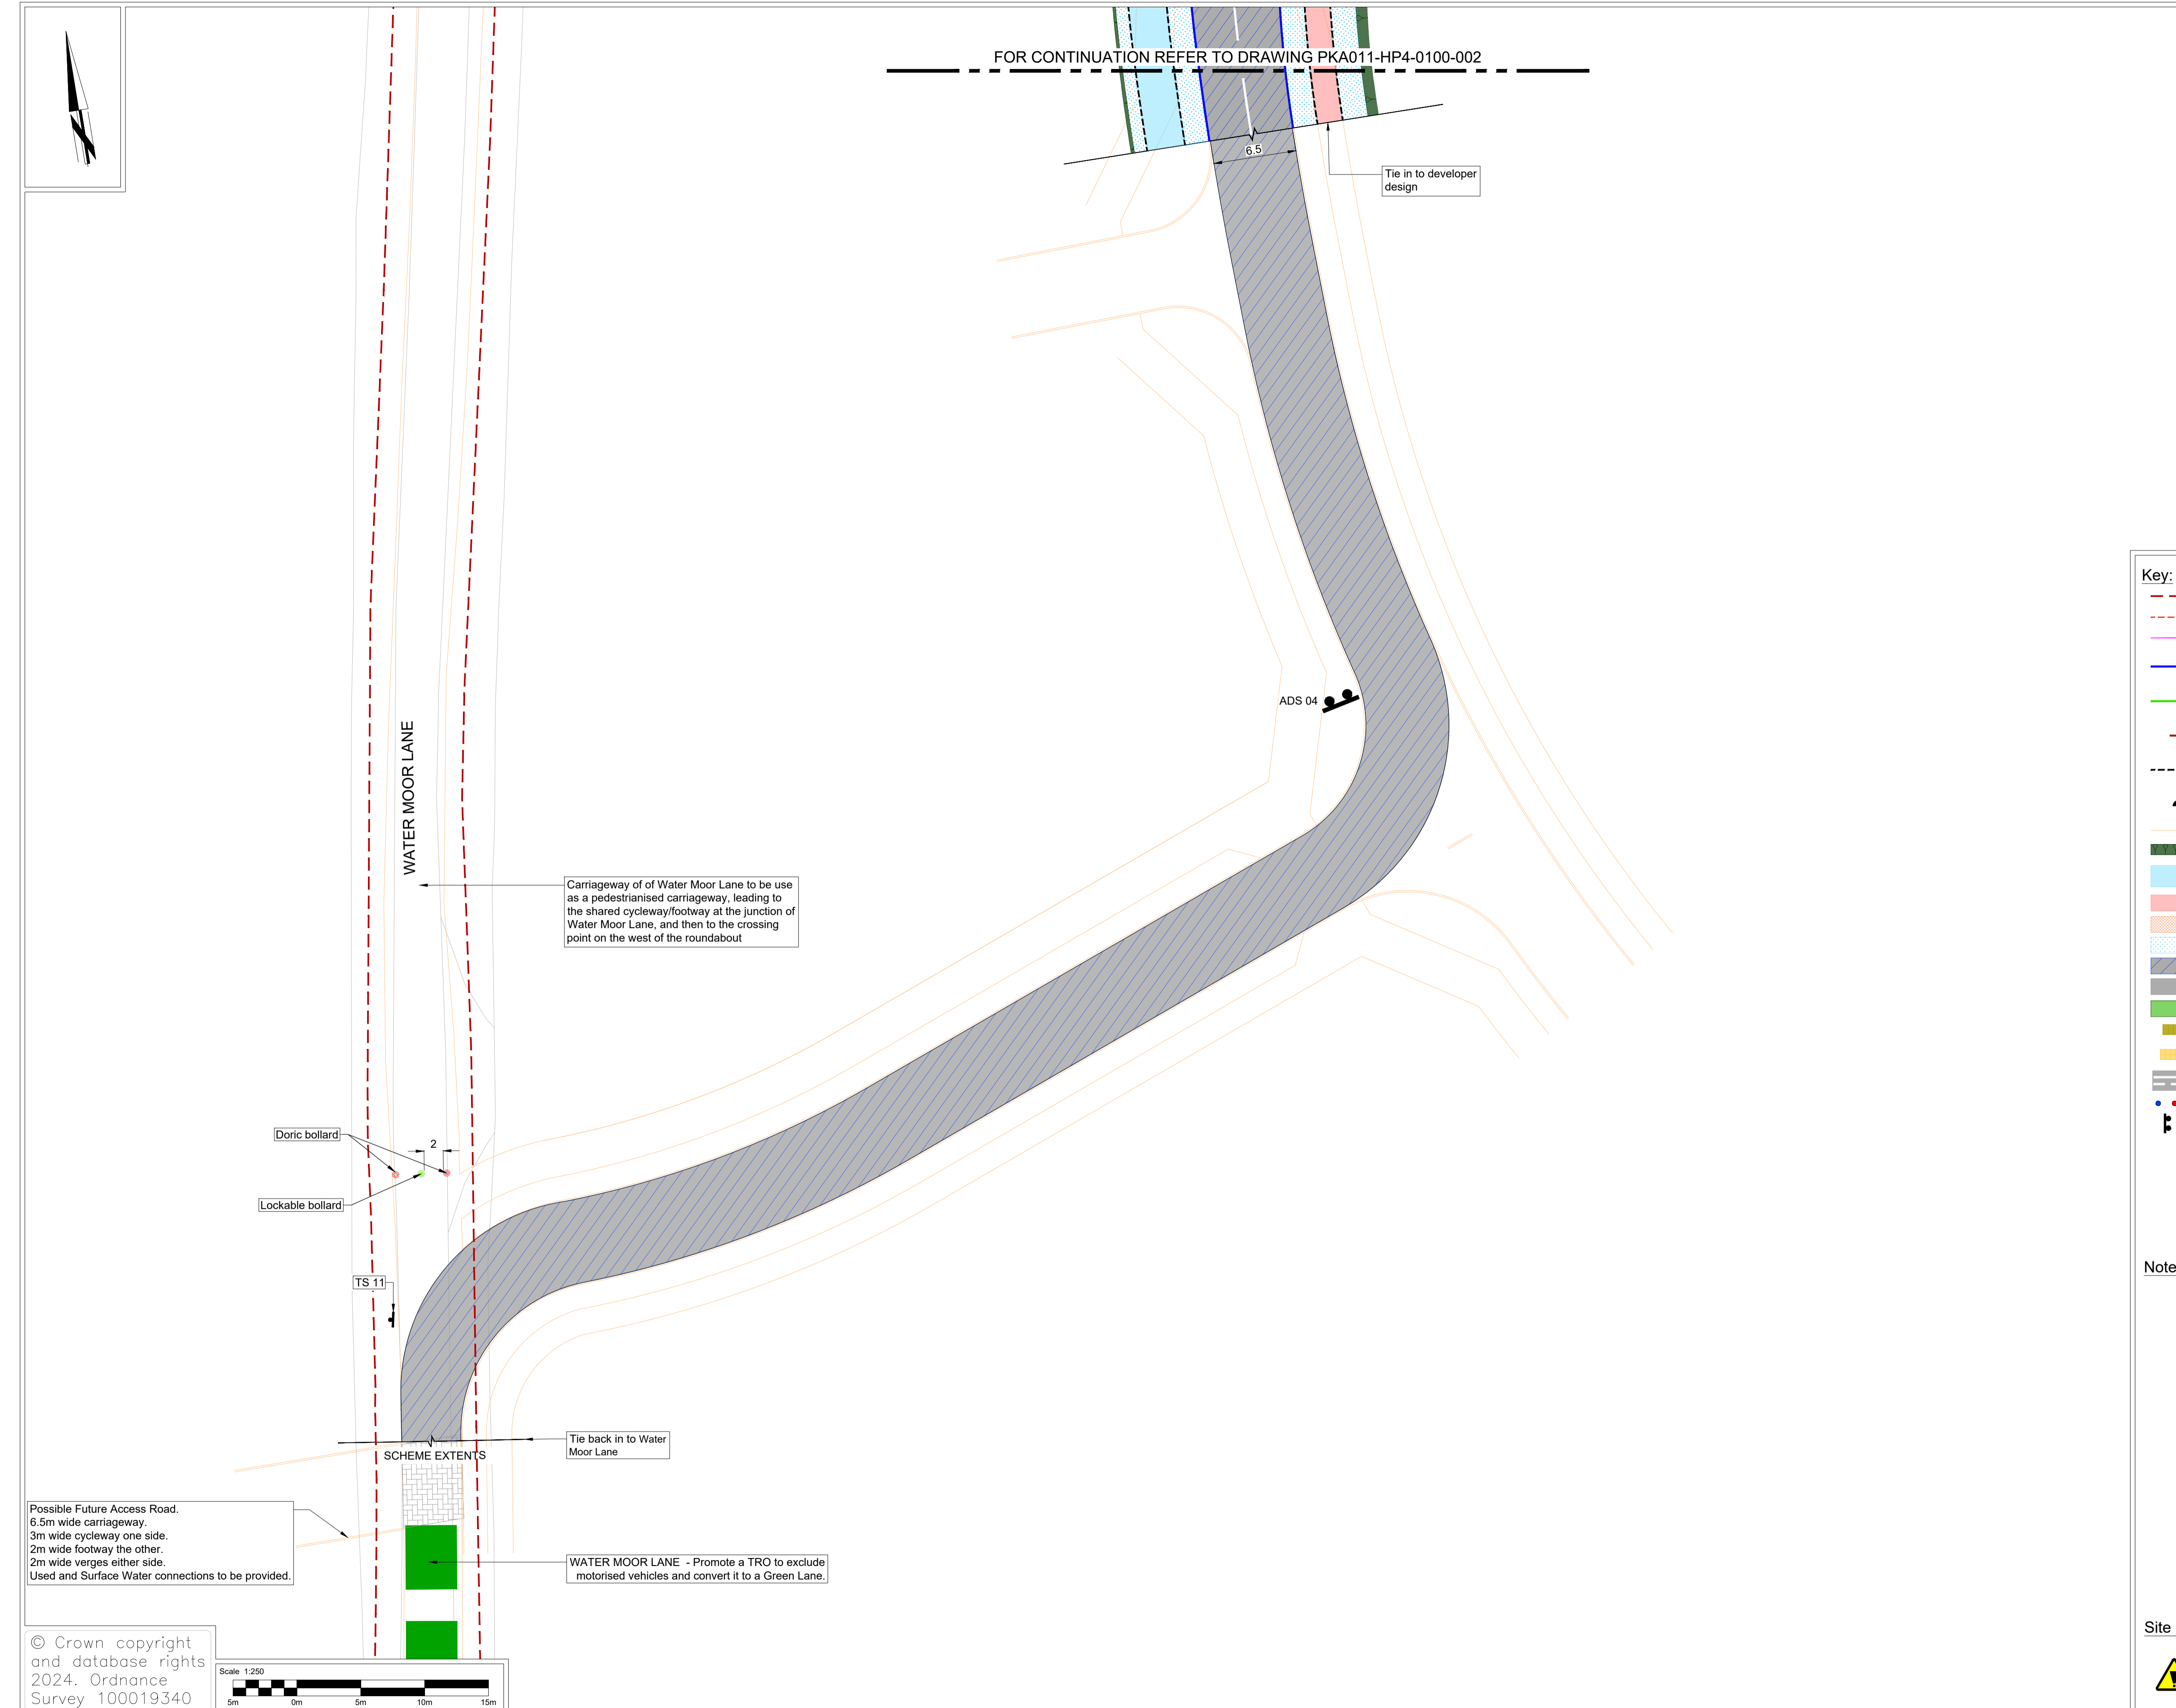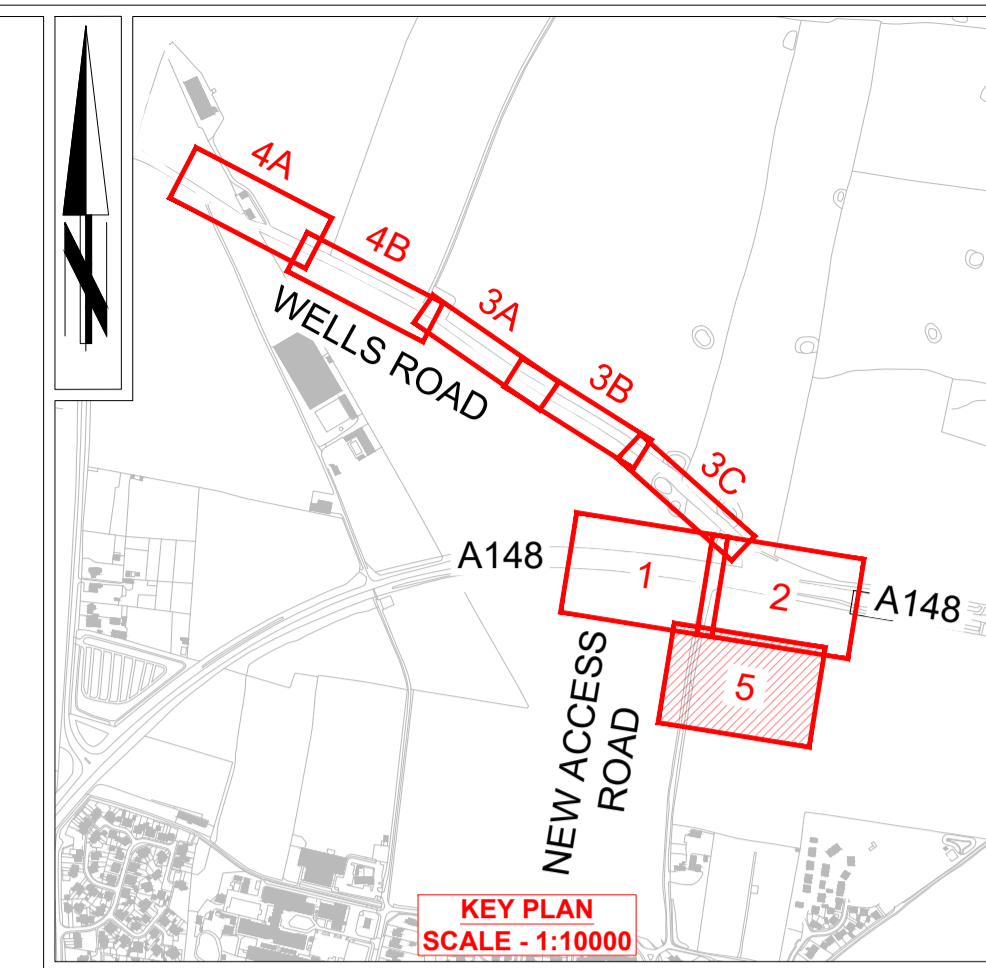

- Key:**
- Highway boundary
 - - - - Proposed road widening at new passing place.
 - Proposed road edge.
 - New precast concrete HB2 kerb with 125mm upstand. For kerb details refer to NCC standard dwg NCD-1100-02.
 - New precast concrete Bullnose kerb with 6mm upstand in pedestrian and cycleway crossings. For kerb details refer to NCC standard dwg NCD-1100-02.
 - New precast concrete Transition kerb. For kerb details refer to NCC standard dwg NCD-1100-20.
 - New precast concrete Edging. For kerb details refer to NCC standard dwg NCD-1100-02.
 - New precast concrete Quadrant kerb with R 455mm. For kerb details refer to Marshalls concrete kerb guide. Ref No. RK4710000.
 - Developer masterplan road layout.
 - Proposed earthwork.
 - New shared cycleway/footway full depth construction, refer to Appendix 11/1 for specification.
 - New footway full depth construction, refer to Appendix 11/1 for specification.
 - Proposed splitter island construction, refer to Appendix 11/1 for specification.
 - Topsoil and grass seed verge area.
 - Carriageway: Full construction, refer to Appendix 7/1 for specification.
 - Existing carriageway resurfacing, refer to Appendix 7/1 for specification.
 - New cycle track, refer to Appendix 11/1 for specification.
 - Proposed corduroy paving
 - New buff coloured tactile paving. For tactile details refer to NCC standard dwg NCD-1100-21.
 - Proposed road markings.
 - ● ● Proposed bollards.
 - Proposed traffic signs.

- Notes:**
1. Ordnance survey details shown coloured grey; do not scale from OS details.
 2. Existing surveyed details are shown coloured green.
 3. Contractor will need to liaise with occupiers of the properties adjacent to the works prior to carrying out any works that may affect their property.
 4. This drawing is to be read in conjunction with all other drawings, specification and other related information.
 PKA011-HP4-0100-006 to 017 for Cross Sections,
 PKA011-HP4-0100-018 to 023 for Plan & Profiles,
 PKA011-HP4-0100-024 to 028 for Contour Plan,
 PKA011-HP4-0100-029 to 033 for Isopachyte Plan,
 PKA011-HP4-0200-001 to 005 for Site Clearance,
 PKA011-HP4-0700-001 to 005 for Pavement Construction Plan,
 PKA011-HP4-1100-001 to 005 for Kerbs, Footways & Paved Areas,
 PKA011-HP4-1200-001 to 005 for Road Markings and Signs,
 PKA011-HP4-1200-006 & 009 for Sign Face, Post and Foundation Details.
 5. See Appendix 12/1 for traffic sign, post & foundation details.
 6. All dimensions are in metres unless otherwise stated.

- Site Risks:**
1. Refer to the scheme Health & Safety Plan for details of identified risks.
 2. Prior to any excavation works, the contractor shall verify, if necessary by GPR survey and trial holes, the exact positions of all known services on site.

Possible Future Access Road.
 6.5m wide carriageway.
 3m wide cycleway one side.
 2m wide footway the other.
 2m wide verges either side.
 Used and Surface Water connections to be provided.

© Crown copyright and database rights 2024. Ordnance Survey 100019340

Scale 1:250

Norfolk County Council

Tom McCabe
 Executive Director of
 Community and Environmental Services
 Norfolk County Council
 County Hall, Martineau Lane
 Norwich NR1 2SG

DRAWING TITLE
 Wells Road, Fakenham Roundabout
 General Arrangement
 Sheet 5 of 5

REV.	DESCRIPTION	CHECKED	DATE
P01	FIRST ISSUE	TL	14-JUL-23
P02	UPDATED DWG AS PER RSA STAGE 2 COMMENTS	SS	11-APR-24

DESIGNED BY	INITIALS	DATE	DRAWING No. PKA011-HP4-0100-005
DRAWN BY			PROJECT TITLE
			Wells Road, Fakenham Roundabout
CHECKED BY			SCALE
			1:250 @ A1
APPROVED BY			FILE No.
			PKA011